


# ACCESS CONTROL PUSH BUTTON

ILLUMINATED, PUSH TO EXIT BUTTON



## PRIMARY APPLICATIONS

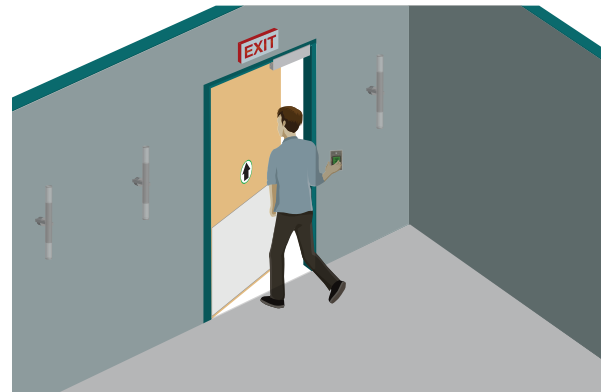

## DESCRIPTION

BEA's Access Control Push Button is part of the request-to-exit product line, including presence sensors, power supplies, ruggedized pneumatic push buttons, heavy duty piezo buttons, access keypads, a complete range of maglocks and other devices designed for controlled access applications.

BEA's Access Control Push Button is an illuminated access control solution, consisting of a stainless steel faceplate and brightly-lit plastic button. It is appropriate for most indoor and low-ambient light applications.

## FEATURES & BENEFITS


- Easily replaced 12 – 24 VAC / VDC light bulb, reducing whole-product replacement
- Stainless steel faceplate
- Vandal / tamper resistant design
- Tested to perform more than 1 million operations



BEA, Inc.  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462  
Technical Support: 800.407.4545  
[www.BEAinc.com](http://www.BEAinc.com)


## APPLICATIONS

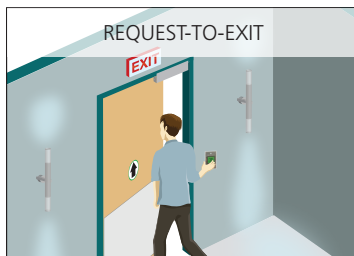

## TECHNICAL SPECIFICATIONS

|                             |                                                                              |
|-----------------------------|------------------------------------------------------------------------------|
| <b>Technology</b>           | Mechanical switch and light socket                                           |
| <b>Faceplate Dimensions</b> | Single Gang - 2.75 in (W) × 4.5 in (H)                                       |
| <b>Visual Style</b>         | Illuminated Green button that signals activation, which can also be disabled |
| <b>Materials</b>            | Stainless steel faceplate with tamper-resistant screws                       |
| <b>Input Power</b>          | 10 A @ 125 / 250 VAC                                                         |
| <b>Time Range</b>           | Momentary switch, no delay                                                   |
| <b>Bulb Power</b>           |                                                                              |
| High Volt Bulb              | 60 mA @ 24 VDC (P/N C656)                                                    |
| Low Volt Bulb               | 190 mA @ 12 VDC (P/N CM-161)                                                 |
| <b>Relay</b>                | SPDT, color coded wiring (Open / Closed)                                     |

## DIMENSIONAL DRAWINGS

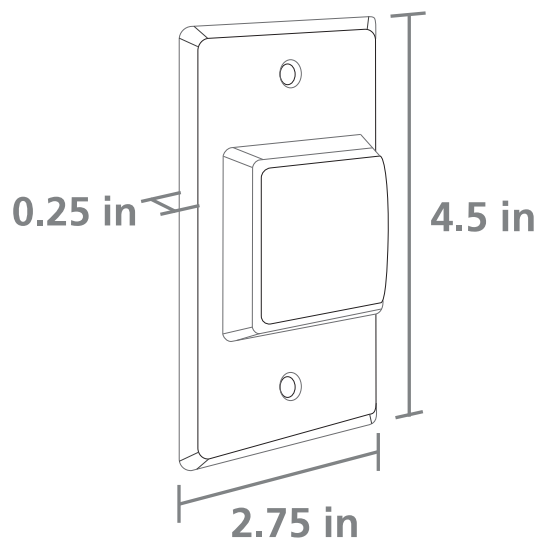

## RELATED PRODUCTS



**10ACPBSS1**  
SINGLE,  
TEXT ONLY



**10BOX24SGSM**  
STANDARD  
SURFACE MOUNT  
BOX

[www.BEAinc.com](http://www.BEAinc.com)

© 2017 BEA, Inc. All rights reserved.

**ACCESS CONTROL PUSH BUTTON**

ILLUMINATED, PUSH TO EXIT BUTTON

BEA, Inc.  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462  
Technical Support: 800.407.4545

