

45-SVR & F45-SVR Series



GRADE 1 Cross Bar Narrow Stile Surface Vertical Rod Exit Device

LIFETIME WARRANTY


BHMA™ CERTIFIED
Be Safe. Be Secure. Look for the Mark.



Specifications

- For Doors.....** 1 3/4"- 2 1/4" thick standard.
1 3/4" minimum stile width for single or double door application.
- Top & Bottom Chassis.....** Steel material for Panic and Fire Grade.
- Cover.....** Aluminum material
- Mounting.....** Furnished with wood and machine screws.
(12) Thru-Bolts are included and standard packaging on fire rated devices.
- Hand.....** Non-Handed. Reversible
- Latch Bolt.....** Stainless Steel S304 material
- Rod Guide.....** Stainless Steel S304 material
- ANSI Standard.....** A156.3, Grade 1
- Cross Bar.....** Aluminum material; 1" diameter, 0.058" thick
- Strike.....** (610) Roller Rim Strike, (620) Top Strike, (233) Bottom Strike, (221) Handicap Bottom Strike
- Dogging Feature.....** Allen-type key furnished standard on non-fire labeled devices
- UL and ULC Listed.....** 45-SVR Series for Panic. F45-SVR Series for Fire Exit hardware for all types of 4' x 8' single doors and 8' x 8' double doors for up to 3 hour fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes
- Finish.....** Aluminum (Alum), Dark Bronze Duranodic (Duro)

***Americans with Disability Act (ADA) compliant
5 lbs opening force on ADA Series only
*Refer to the Price List for Stock Sizes and Finishes**

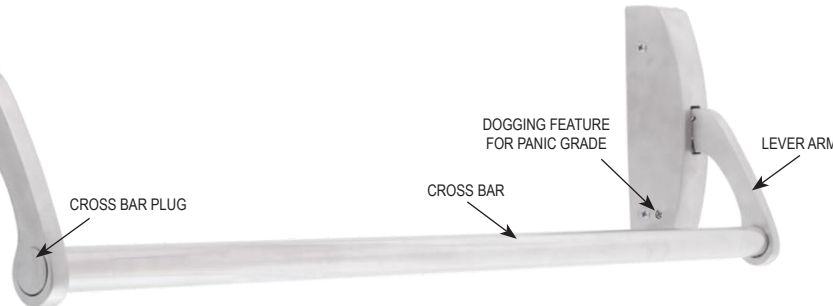

DIMENSIONS

Touchbar height to finished floor	41" (1041 mm) at center
Touchbar projection	
Neutral	5 13/64" (132 mm)
Depressed	4 7/32" (107mm)
Main case	8 55/64" x 1 17/32" x 2 13/64" (225 mm x 39 mm x 56 mm)
End case	8 55/64" x 1 17/32" x 2 13/64" (225 mm x 39 mm x 56 mm)
Panic grade top & bottom latch case	4 11/16" x 1 1/16" x 1 47/64" (119 mm x 27 mm x 44 mm)
Fire grade top & bottom latch case	4 11/16" x 1 1/16" x 1 47/64" (119 mm x 27 mm x 44 mm)
Top and bottom rod length for 36" x 84" doors	Top rod 34 27/32" (885 mm), bottom rod 33 35/64" (852 mm)
Top and bottom rod length for 48" x 96" doors	Top rod 34 27/32" + 12" ETR (910.4 mm), bottom rod 33 35/64" (852 mm)
Vertical Rods	15/32" (11.9 mm) round tubing

MODEL	ACTUAL LENGTH	DOOR SIZE	CROSS BAR LENGTH
45-SVR-3684, F45-SVR-3684	34 19/64"	Up to 36" door width	33 17/64"
45-SVR-4896, F45-SVR-4896	46 19/64"	Up to 48" door width	45 9/32"