

AL175UL

Switching Power Supply/Charger

Altronix AL175UL Switching Power Supply/Charger converts a 115VAC 60Hz input into two (2) individually PTC protected auto-resettable 12VDC or 24VDC outputs.



AL175UL

Specifications

Input

Voltage	115VAC, 60Hz, 0.6A
Trigger	Access control trigger input

Outputs

Two (2) Class 2 Rated power-limited outputs

- Fail-Safe/Fail-Secure lock output (switched)
- Auxiliary power output (unswitched)

Voltage	12VDC or 24VDC selectable
Current	1.75A continuous max.
Other	Short circuit and thermal overload protection

Back-up Battery *(not included)*

Type	Sealed lead acid or gel type
Failover	Upon AC loss, instantaneous

Fire Alarm Disconnect

Supervised	Latching or non-latching
------------	--------------------------

Supervision

AC Failure	Form "C" contacts
------------	-------------------

Indicators (LED)

Input	Input voltage is present
DC Output	Powered

Agency Listings

UL	UL294 (Access Control)
cUL	CSA Standard C22.2 No.205-M1983, Signal Equipment
CSFM	CSFM Approved

Physical and Environmental

Dimensions (H x W x D)

Enclosure:	8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)
Shipping:	13" x 10" x 7" (330.2mm x 254mm x 177.8mm)

Weight (approx.)

Product:	5.1 lb. (2.31 kg)
Shipping:	5.6 lb. (2.54 kg)

Temperature

Operating:	0°C to 49°C (32°F to 120°F)
Storage:	- 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

BTU/Hr. (approx.):

12VDC:	11 BTU/Hr.
24VDC:	22 BTU/Hr.

Lifetime Warranty


AL175UL

Switching Power Supply/Charger

Dimensions and Drawing

Dimensions (H x W x D approximate)

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

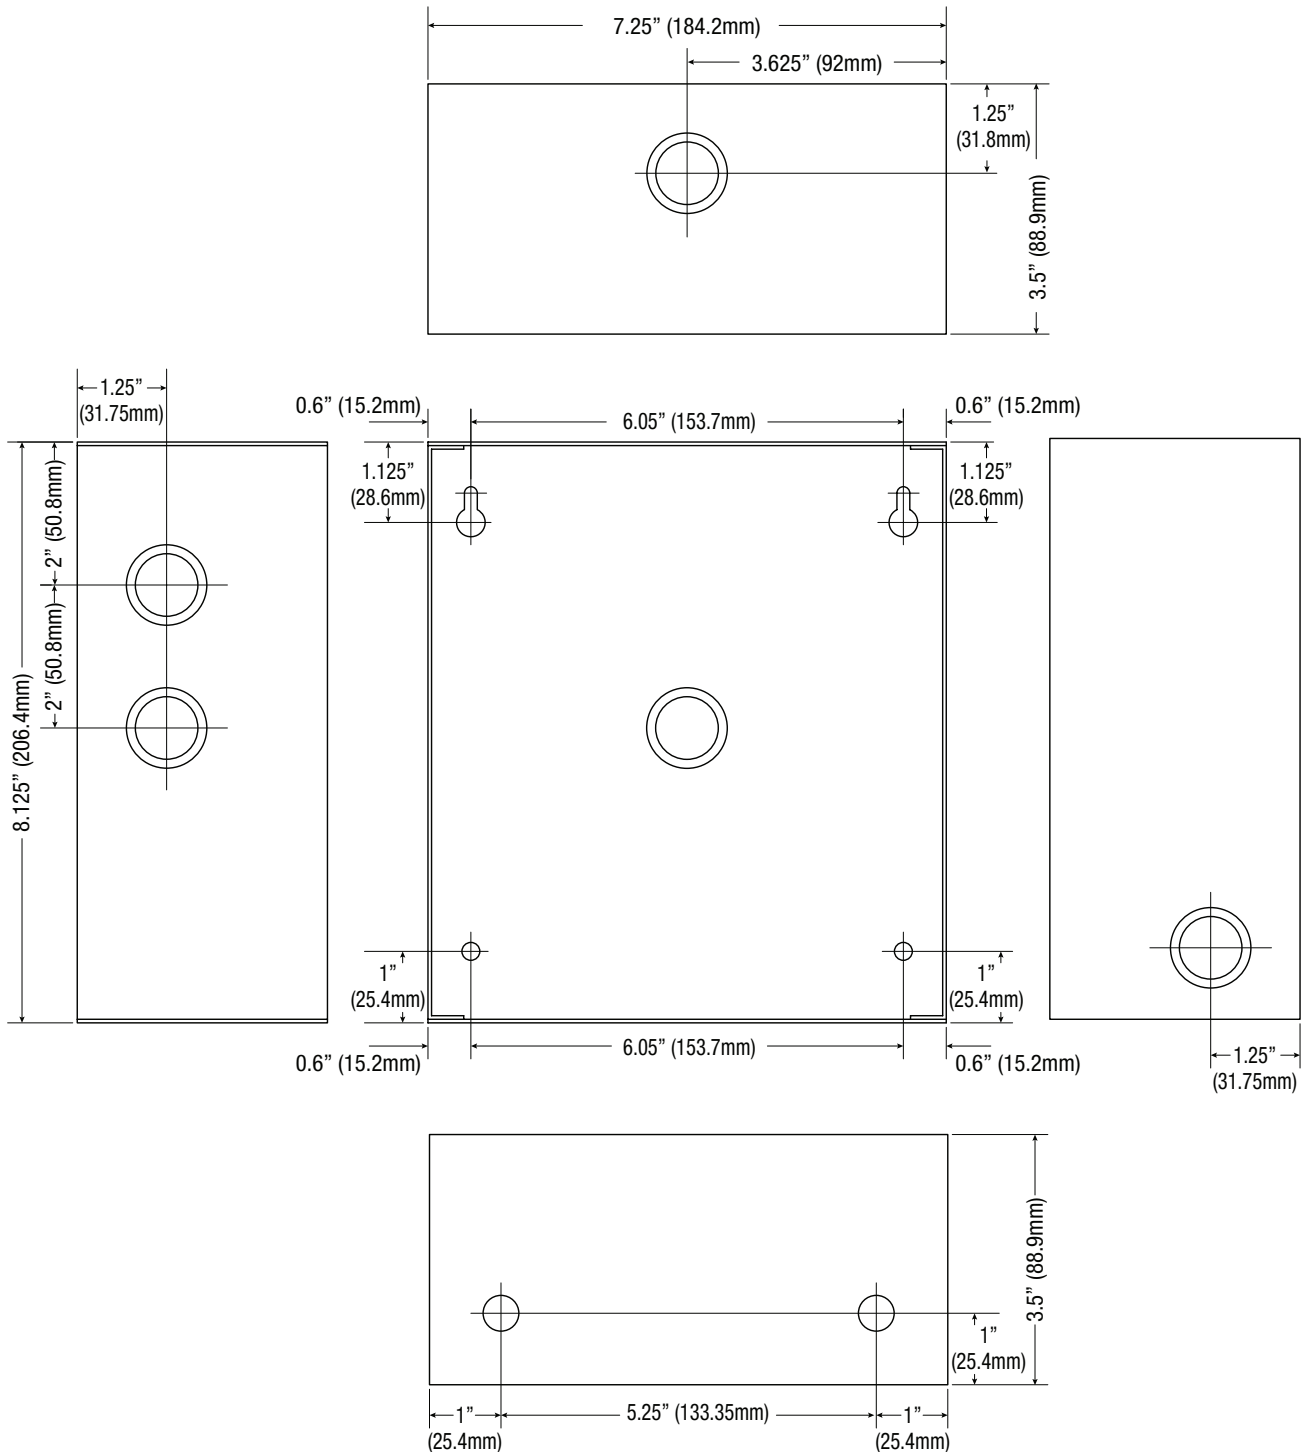

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com