

3D INVISIBLE HINGES


MAIN FEATURES

- » Zinc Alloy manufactured for Oxidation Resistance
- » Durable Galvanized Steel Covers to conceal the screws
- » Used for Wood and Hollow Metal Doors
- » **Easy 3D Adjusting System or Fixed**
- » Easy Installation and Maintenance Free
- » Complete Reversibility (same slot on the door and the frame)
- » Total Recessed Hinge Body (door and frame gap is very small)
- » **UL Listed for 2-Hour Fire Rated Doors**
- » **European Standard EN1634-1 for 120-Minute Fire Doors**
- » **CE Certified for 200,000 Opening / Closing Cycles**
- » **100% Made in Italy**
- » Elegant Minimalistic Design that is available in **US1, US4, US10B, US14, US15, US26, US26D and US28** finishes with no visible screws



CR3D62

Dimensions: 6 5/16" x 1 1/4"
(160 x 32 mm)

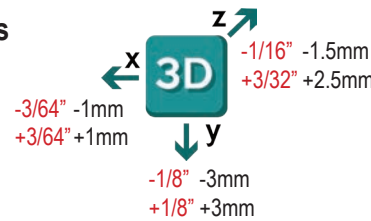

TECHNICAL SPECIFICATIONS:

- 180° Fluid Opening
- 1 1/2" (38mm) minimum door thickness
- Overall Length: 6 5/16" (160mm)
- Width (frame part): 1 1/4" (32mm)
- Width (door part): 1 1/4" (32mm)
- Depth: 1 1/8" (29mm)
- Load Capacity: 3 or 4 Hinges - 120kg (265lbs)
2 Hinges - 80kg (177lbs)
- Fire Proof Min. : EI-120'

