


# GENESYS

**INDCGN-20 SERIES - ANSI GRADE 1,  
NON-CLUTCH PRIVACY INDICATOR LEVERSET**



**MEETS**  
*The Buy American Act*

**LIFETIME  
WARRANTY**

**BHMA<sup>TM</sup>**  
**CERTIFIED**  
Be Safe. Be Secure. Look for the Mark.



**Inside  
Push Button**




**GN DESIGN**



**Red (IN USE) and  
Green (VACANT)  
Indicator**

For other lever designs,  
replace **GN**, with design name.  
Example: **INDCGN-20 U26D** in  
"AUG" is **IND-AUG-20 US26D**

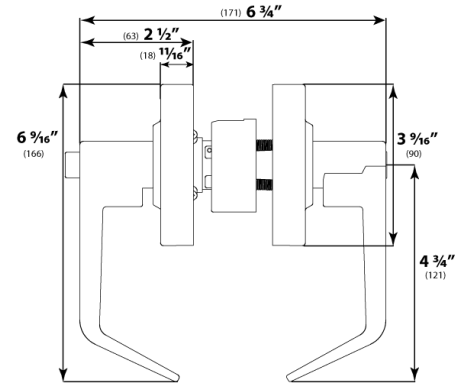

**ALP DESIGN**



**AT DESIGN**



**SPA DESIGN**



**TUB DESIGN**



**AUG DESIGN**



**DAN DESIGN**



**LON DESIGN**



**TAC DESIGN**

## SPECIFICATIONS

### GENERAL

Full length 4 3/4" lever handle with 3/8" return.  
Rose diameter 3 9/16". Non-handed levers.  
Concealed mounting screws.

### APPLICATIONS

For offices, schools, hospitals, corrosive environments,  
commercial and public buildings.

### DOOR RANGES

For 1 3/8" to 1 3/4" thick doors. Specify door thickness upon ordering.

### ANSI STANDARDS

Meets ANSI / BHMA A156.2 Series 4000, Grade 1 requirements.

### STRIKES

ASA 1 1/4" x 4 7/8" standard. Other strikes available upon request.

### TRIM

Thru-bolted assembly through door with separate spring cage for each lever.

### HOUSING

Cold Rolled Steel and Zinc Dichromate finish for rust resistance  
with precision cast steel retractor. 2 1/2" diameter bore.

### LATCH FACEPLATE

Standard 2 1/4" x 1 1/8" for 2 3/4" backset.  
Optional 2 1/4" x 1" for 2 3/8" backset.

### LATCH OPTIONS

2 3/4" standard, brass with 1/2" throw. 2 3/8", 3 3/4" & 5" backset optional.  
GND750 deadlatch reversible for flat and beveled door.  
3/4" throw anti-friction deadlatch for pair of fire doors.

**EMERGENCY SLOT** on the outside trim to unlock door in case of emergency.