

# KNOBSET / DEADBOLT COMBO PACK

**6-PIN "C" KEYWAY CYLINDER, KEYED ALIKE**

**BARRINGTON / T220 (BA00 / T220)**

QUALITY DESIGNED AND ENGINEERED FOR  
COMMERCIAL AND RESIDENTIAL APPLICATIONS

**MEETS**  
*The Buy American Act*




Outside rose, threaded 3" diameter large rose adjustable for various door thickness


Long spindle hub eliminates hub wobble

Deadlatch affords a high degree of security. Standard with solid, rustless, pressure cast. #300 series anti-magnetic stainless steel or brass latch bolt available with UL listed latch bolt for 3 hour rated door 4' x 8' or non-UL latch bolt

Cylinder knob demountable for quick re-keying and replacement: reversible for either left or right hand door swinging in or out



**BA DESIGN**

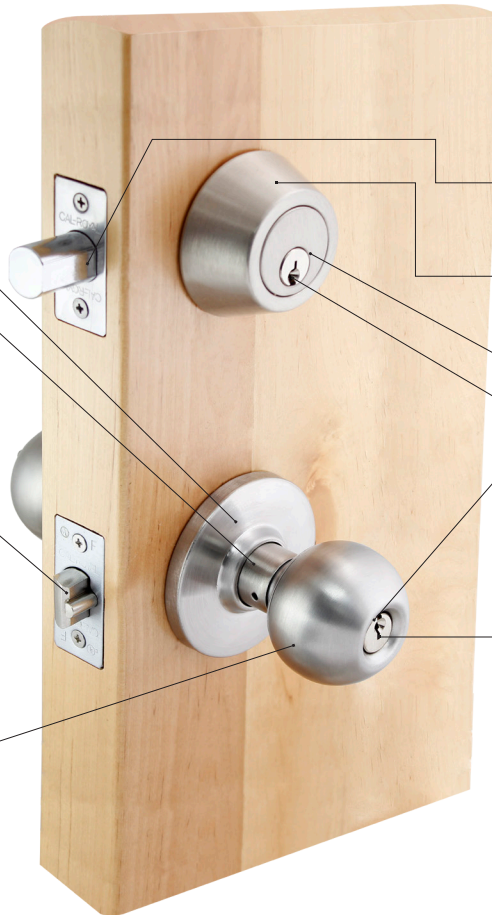


Sturdy, all steel latch case and mechanism

2 1/2" diameter tapered cylinder guard and metal insert, turns free with any removal attempt

Cast iron solid housing

Solid brass 6 pin "C" keyway cylinder; Keyed alike

Cylinder precision solid brass. Pick resistant 6-pin tumbler. Must turn key one-quarter to remove and replace cylinder. Can be construction keyed and master keyed as required

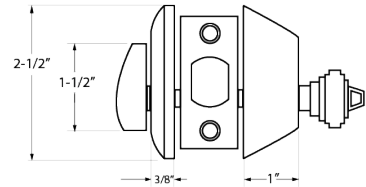

**T220 DEADBOLT**

**PACKAGED TOGETHER**  
**IN THE SAME BOX**

## SPECIFICATIONS

### BARRINGTON

**DOOR RANGES**

1 3/8" to 1 3/4" thickness doors

**BACKSET**

2 3/4" Standard, 2 5/8" Optional

**LATCH FACEPLATE**

2 1/4" x 1 1/8" for 2 3/4" backset, 2 1/4" x 1" for 2 5/8" backset

**STRIKES**

ANSI strike standard, 4 7/8" x 1 1/4". Optional "T" and full lip strike available on request

**EXPOSED TRIM**

Wrought Brass, Bronze or Stainless Steel

**BORE DIAMETER**

1" for latch. 2 1/8" for lock housing

**ANSI STANDARDS**

Meets or exceeds requirements of BHMA / ANSI A156.2 Series 4000 for Grade 2 (FF-H-106C)

### T220

**DOOR RANGES**

1 3/8" to 1 3/4" thickness doors

**BACKSET**

Adjustable 2 3/8" or 2 3/4"

**DEADBOLT FACEPLATE**

Latch bolt: Standard 2 1/4" x 1" packed with 1/8" plastic filler to convert 1" face plate to 1 1/8" wide door preparations

**TRIM**

Wrought Brass or Stainless Steel

**BORE DIAMETER**

1" for latch, 1 1/2" or 2 1/8" for lock housing

**STRIKE**

1 1/8" x 2 3/4" Square Corner