

The 7000 Series is also available in a **Complete One Box Solution**

HES® 7000 Electric Strike

Works with cylindrical latchbolts up to 5/8" throw and rim exit devices up to a 3/4" throw



The dual, preload solution for cylindrical latch bolts and rim exit devices.

The 7000 Series offers two solutions to address preloaded doors. The in-frame adjustable feature allows the installer to easily adjust the electric strike opening to accommodate the horizontal position of the latchbolt after installation.

The preload release function allows the electric strike to operate smoothly throughout the year under varying loads on the door caused by airconditioning pressure, changes in the weather, warped doors or doors with weather stripping that often bind standard electric strikes. This unit accommodates cylindrical latchbolts up to 5/8" throw and rim exit latchbolts up to 3/4" throw.

Features

Standard Features

- Stainless steel construction
- Tamper-resistant
- Static strength 1,500 lbs (791 and 792 options)
- Dynamic strength 70 ft-lbs (791 and 792 options)
- Static strength 1,000 lbs (783S, 786S, and 789S options)
- Dynamic strength 50 ft-lbs (783S, 786S, and 789S options)
- Endurance 1 million cycles
- Field selectable fail secure/fail safe
- Accommodates preload (up to 15lbs: fail secure only)
- Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Strike body depth 1-11/16"
- Plug-in connector
- Trim enhancer (791 and 792 options)
- Pocket adapter (786S and 789S options)
- SecuriCare five-year, no fault, no questions asked warranty

Optional Features

- **LBM** Latchbolt monitor

Accessories

- **SMB** Surface mounting box (783S and 789S options)
- **7000-104** Lip extension trim adapter
- **7000-105** Trim enhancer (goof plate)
- **7000-106** Keeper pocket adapter
- **7000-107** Full keeper shim pack
- **7000-108** 1/8" spacer plate (783S and 789S options, black finish only)
- **7000-110** Replacement strike plate (791 and 792 option)
- **150** Strike latch guard
- **HESCUT-MTK** Metal template kit
- **2001M** Plug-in bridge rectifier
- **2004M** Electrolynx® adapter
- **2005M3** SMART Pac® III
- **2006M** Plug-in buzzer



Grade 1



SecuriCare
Warranty



Cylindrical
Locksets



Rim Exit
Devices



Field Selectable
(Fail secure
/Fail safe)



Dual Voltage
12/24




Preload



Burglary
Rated

Dimensions

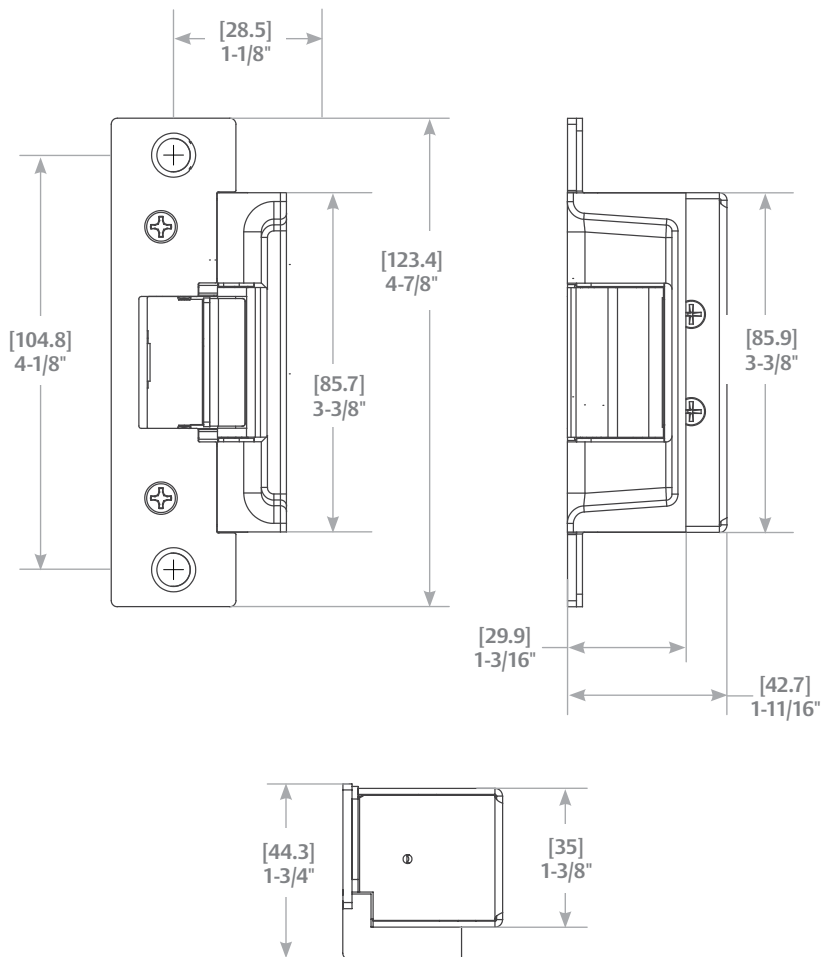

Specifications

Certifications

- ANSI/BHMA A156.31, Grade 1 (791 & 792 options)
- ANSI/BHMA A156.31, Grade 2 (783S, 786S & 789S options)
- UL 1034 burglary-resistant listed
- UL 294 (6th Edition) listed

Frame Application

- Metal
- Wood

Electrical (DC Continuous Duty)

- Dual voltage 12/24 VDC
- 450 mA at 12 VDC/250 mA at 24 VDC


How to Order

Series	Model	Finish*		Option (s)
7000	—	— 630		— LBM
7000 Universal Electric Strike; Faceplates ordered separately	C* Complete Electric Strike; Includes the 791 and 792 faceplates	791 and 792 Options	783S, 786S, 789S Options	LBM Latchbolt Monitor
		605 Bright Brass	613E Dark Oxidized Satin Bronze	
		606 Satin Brass	630 Satin Stainless Steel	
		612 Satin Bronze		
		613E Dark Oxidized Satin Bronze		
		629 Bright Stainless Steel		
		630 Satin Stainless Steel		
		BLK Black		


*Complete Pacs are only available in the 630 finish

HES 7000 Series Rim Exit Device Options


783S Option

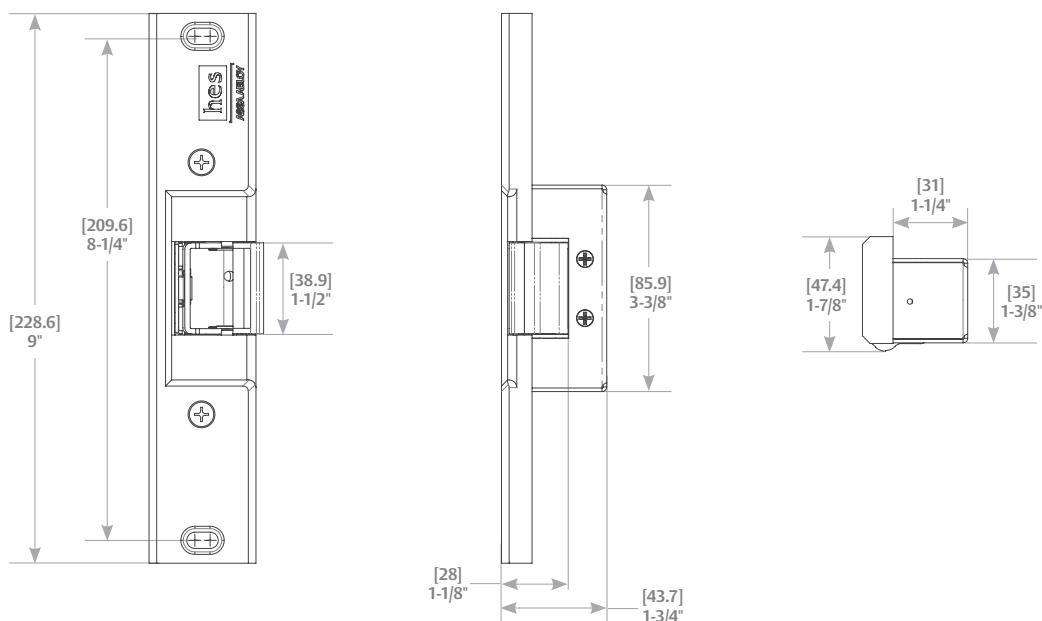

786S Option

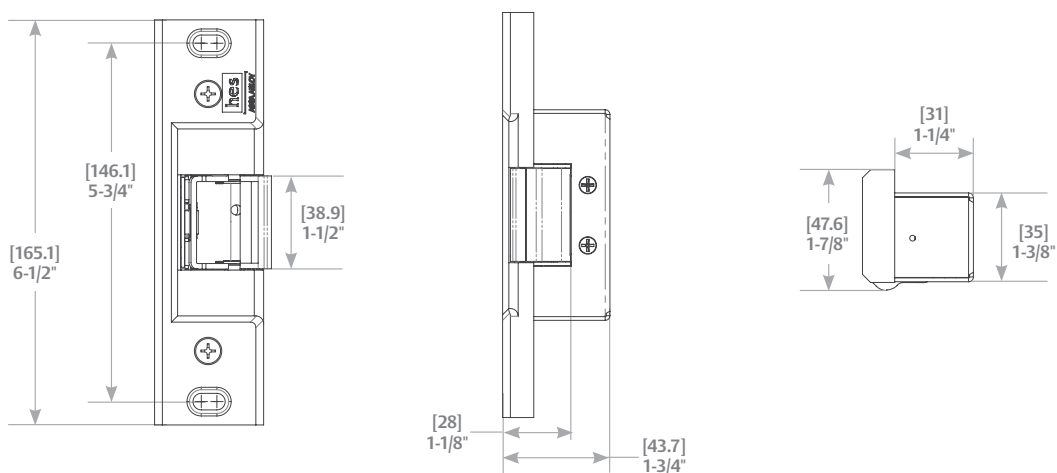

789S Option

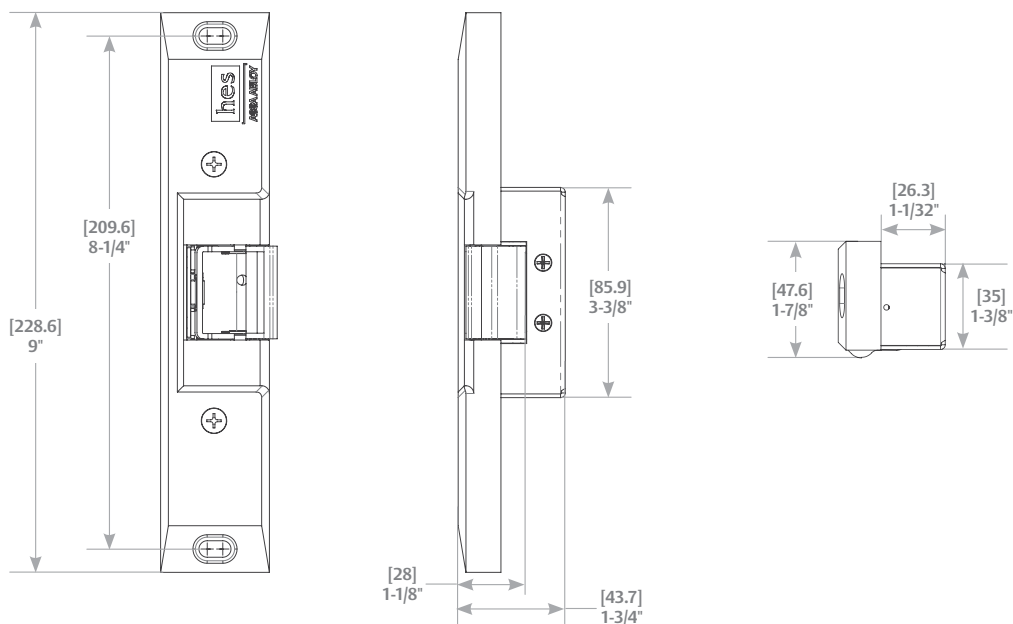

HES 7000 Series Faceplate Options



Operation: After releasing the latchbolt, the keeper returns to the locked position



4-7/8" × 1-1/4"

791 Option

For use with: Cylindrical locksets up to 5/8" throw

» ANSI/BHMA Numbers: E09321, E09322, E09323



1

Grade 1



7-15/16" × 1-7/16"

792 Option

For use with: Cylindrical locksets up to 5/8" throw

» ANSI/BHMA Numbers: E09321, E09322, E09323




1

Grade 1



Operation: After releasing pullman latch, the keeper returns to the locked position




9" × 1-3/4" × 11/16"

783S Option

For use with: Rim exit devices in metal jambs with up to a 3/4" pullman latch


Compatible locksets: American Device, Arrow, Dor-O-Matic, Monarch, Precision, Sargent, Von Duprin, Yale

» ANSI/BHMA Numbers: E09311, E09312, E09313



2

Grade 2




6-1/2" × 1-3/4" × 1/2"

786S Option

For use with: Rim exit devices in aluminum jambs and surface mounted vertical rod exit devices with up to a 3/4" pullman latch. Includes keeper pocket adapter.


Compatible locksets: American Device, Arrow, Dor-O-Matic, Jackson, Monarch, Precision, Sargent, Von Duprin, Yale

» ANSI/BHMA Numbers: E09311, E09312, E09313



2

Grade 2




9" × 1-3/4" × 1/2"

789S Option

For use with: Rim exit devices in aluminum jambs with up to a 3/4" pullman latch. Includes keeper pocket adapter.

Compatible locksets: American Device, Arrow, Dor-O-Matic, Jackson, Monarch, Precision, Sargent, Von Duprin, Yale

» ANSI/BHMA Numbers: E09311, E09312, E09313



2

Grade 2

"For use with" information is offered as a recommendation only. Reference should be made to the lockset manufacturer for proper installation instructions necessary to meet compatibility requirements.