


6660V & F6660V Series

GRADE 1 Vertical Rod Type Exit Device



Specifications

For Doors.....	1 3/4" thick Standard. Optional 2 1/4" thick. 3 3/4" minimum Stile Width required for single door application. 3 1/2" minimum Stile Width required for double door application. Lever, thumb piece and escutcheon trims available.
Top & Bottom Chassis.....	Steel material for Panic and Fire Grade.
Cover.....	Aluminum, Zinc or Stainless Steel S304 material. Covers stock hollow metal doors with 161 cut out.
Mounting.....	Furnished with wood and machine screws. (9) Thru-Bolts are included and standard packaging on fire rated devices.
End Cap.....	Steel or Stainless Steel S304 construction
End Bracket.....	Steel material
Hand.....	Handed. Easily field reversible. Specify at time of order LHR, RHR for convenience

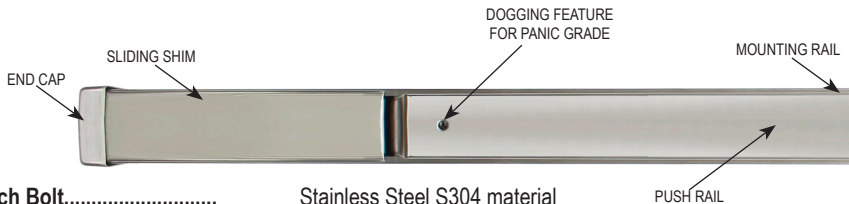

Latch Bolt.....	Stainless Steel S304 material
Rod Guide.....	Steel or Stainless Steel S304
ANSI Standard.....	A156.3, Grade 1
Rail Assembly.....	Heavy gauge extruded Steel or Stainless Steel S304 body and push pad
Strike.....	Top Strike, Bottom Strike, Optional Handicap Bottom Strike (See strike page)
Dogging Feature.....	Allen-type key furnished standard on non-fire labeled devices
UL and ULC Listed.....	6660V Series for panic. F6660V Series for fire exit hardware for all types of 8' x 8' double doors for up to 3 hour fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes
Finish.....	Architectural plated finishes
Anti-Microbial Coating.....	Available on US32D only. Use part # ANTB-EXIT

DIMENSIONS

Touch bar height to finished floor	41" (1041 mm) at center	
Touch bar projection		
Neutral	2 5/8" (67 mm)	
Depressed	1 7/8" (48 mm)	
Center case	8 1/16" x 2 3/4" x 2 1/2" (205 mm x 68 mm x 62 mm)	
Panic grade top & bottom latch case	4" x 2" x 1 3/4" (102 mm x 51 mm x 44 mm)	
Fire grade top & bottom latch case	4" x 2" x 1 3/4" (102 mm x 51 mm x 44 mm)	
Top and bottom rod length for 36" x 84" doors	Top rod 37 1/2" (953 mm), bottom rod 33 1/2" (851 mm)	
Top and bottom rod length for 48" x 96" doors	Top rod 37 1/2" + 12" ETR (1257 mm), bottom rod 33 1/2" (851 mm)	
Vertical Rods	15/32" (11.9 mm) round tubing	

MODEL	ACTUAL SIZE	MAX CUT DOWN	DOOR SIZE	PUSH BAR LENGTH
6660V3684, F6660V3684	32"	6"	30" to 36" door width	21"
6680V4896, F6680V4896	44"	12"	38" to 48" door width	26 1/2"



MINIMUM STILE REQUIREMENTS

Double Door with Two Vertical Rod Type Exit Devices

